


BATTIPAV™

PRIME 700

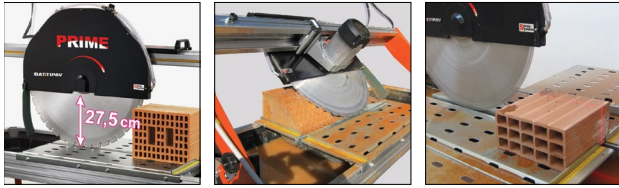

TECHNICAL SPECIFICATIONS		OPTIONAL	
Blade (Ø mm)*	700		SRS kit
Max. straight cutting length (mm)	615		
Extra cut (mm)**	Up to 970 (for 700S) Up to 795		Laser instrument
Max. cutting depth for straight cut (mm)	275		
Max. size tile for diagonal cutting (mm)	435 x 435		B-Lock for thickness up to 40 mm
Max. cutting depth for 45° angle cut (mm)	180		
Tool hole (Ø mm)	25.4		Side bench with rollers
Rotation speed (rpm)	1400		
Motor type	3 phase - 400V ~ 50 Hz		Extension side bench
Motor power (HP / kW, A)	5.5 / 4.0, 8.0		
Water recycling pump type	S3		Side tile support
Water tank capacity (Min. / Max.) (ltrs.)	23 / 36		
Thermic protection (°C)	160		Long slot for side tile support
Amperometrical protection (A)	10 - 16		
Net weight (kg)	113		
Wheels kit	Included		
Cutting progress system	Included		

*Diamond blade not included.

** (S) code for machine includes laser instrument

Ideal for the building sector. New design with vanguard technical innovation, strong and precise, suitable for cutting kerbs, brick blocks, natural stones, poroton & concrete blocks.

Distributor:



شركة الوسام للتجارة ك.م.م.
AL WISAM TRADING CO. L.L.C.

☎ : (+971 6) 539 03 83

✉ : awtc@alwisamllc.com

☎ : (+971 6) 539 03 84

🌐 : www.alwisamllc.com

📍 : 81933, Sharjah - U.A.E.