



SUBMERSIBLE WATER PUMP

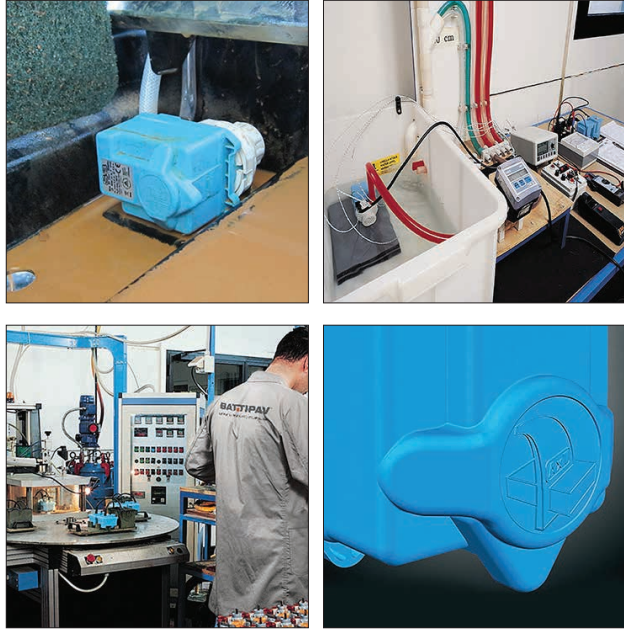

TECHNICAL SPECIFICATIONS

MODEL	S0	S1	S2	S3
Water flow rate (L/h)	700	850	1000	1560
Head (m)	1.9	2.2	2.4	2.5
Cable length (m)	2.2	2.2	2.2	2.2
Weight (kg)	11.9	13.6	13.6	8.5
Isolation class	F	F	F	F
IP grade	X8	X8	X8	X8
ELECTRIC MOTOR	SINGLE PHASE			
Voltage (V)	230	230	230	230
Frequency (Hz)*	50	50	50	50
Power (W)	35	50	55	60

* The pump can operate at 60 Hz but will give different flow rate and head values.

Professional submersible water pump for water recirculation in brick-tile saws. A full range of four models according to the capacity and prevalence of the water. All the special tensions are available.

• Distributor: •



شركة الوسام للتجارة ط.م.م.
AL WISAM TRADING CO. L.L.C.

☎ : (+971 6) 539 03 83 ✉ : awtc@alwisamllc.com
☎ : (+971 6) 539 03 84 🌐 : www.alwisamllc.com
📍 : 81933, Sharjah - U.A.E.