






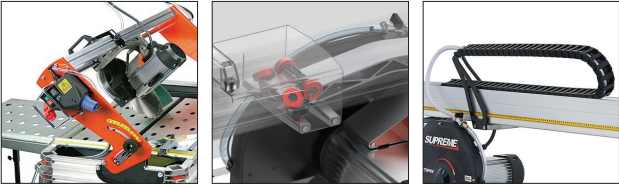


# BATTIPAV™

## SUPREME 150



TECHNICAL SPECIFICATIONS		OPTIONAL
Blade (Ø mm)*	300	 Swivel wheels
Max. straight cutting length (mm)	1500	
Max. cutting depth for straight cut (mm)	85	
Max. size tile for diagonal cutting (mm)	1060 x 1060	 Laser instrument
Max. cutting depth with 2 runs (mm)	135	
Max. cutting depth for 45° angle cut (mm)	60	 B-Lock for thickness up to 40 mm
Working table width (mm)	625	
Tool hole (Ø mm)	25.4	 Lifting belt
Rotation speed (rpm)	2800	
Motor type	1 phase - 250V ~ 50HZ 3 phase - 400V ~ 50Hz	 Extension side bench
Motor power (HP / kW, A)	1 phase - 3.0 / 2.2, 9.0 1 phase - 4.5 / 3.5, 9.0	
Water recycling pump type	S3	 Side tile support
Water tank capacity (Min. / Max.) (ltrs.)	31 / 49	
Thermic protection (°C)	160	 Long slot for side tile support
Amperometrical protection (A)	6 - 10	

\*Diamond blade not included.

*SUPREME is a bridge saw ideal for cutting natural stones, granite and marble slabs. It makes cuts moving forward manually the engine group.*

Distributor:



شركة الوسام للتجارة ط.م.م.  
**AL WISAM TRADING CO. L.L.C.**

☎ : (+971 6) 539 03 83      ✉ : awtc@alwisamllc.com  
☎ : (+971 6) 539 03 84      🌐 : www.alwisamllc.com  
📍 : 81933, Sharjah - U.A.E.