


BATTIPAV™

SUPREME 260S

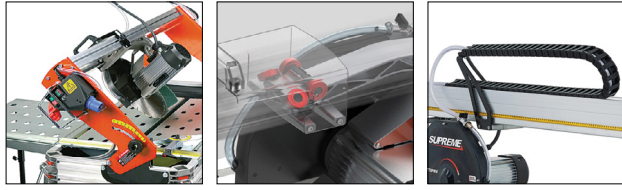

TECHNICAL SPECIFICATIONS		OPTIONAL
Blade (Ø mm)*	300	 Wheels kit
Max. straight cutting length (mm)	2600	
Max. cutting depth for straight cut (mm)	85	 B-Lock for thickness up to 40 mm
Max. size tile for diagonal cutting (mm)	1839 x 1839	
Max. cutting depth with 2 runs (mm)	135	 Lifting belt
Max. cutting depth for 45° angle cut (mm)	60	
Working table width (mm)	625	 Extension side bench
Tool hole (Ø mm)	25.4	
Rotation speed (rpm)	2800	 Side tile support
Motor type	1 phase - 250V ~ 50HZ 3 phase - 400V ~ 50Hz	
Motor power (HP / kW, A)	1 phase - 3.0 / 2.2, 9.0 1 phase - 4.5 / 3.4, 6.0	 Long slot for side tile support
Water recycling pump type	P3	
Laser Instrument	Included	
Amperometrical protection (A)	1 phase - 13 3 phase - 6 -10	

*Diamond blade not included.

SUPREME is a bridge saw ideal for cutting natural stones, granite and marble slabs. It makes cuts moving forward manually the engine group.

Distributor:



شركة الوسام للتجارة ك.م.م.
AL WISAM TRADING CO. L.L.C.

☎ : (+971 6) 539 03 83 ✉ : awtc@alwisamllc.com
☎ : (+971 6) 539 03 84 🌐 : www.alwisamllc.com
📍 : 81933, Sharjah - U.A.E.