



WATER-COOLED




THREE PHASE



50HZ 380-415V



DIESEL FUEL

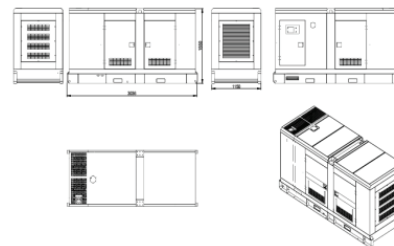

STANDARD SPECIFICATIONS

1. ENGINE
FOUR STROKE HEAVY DUTY HIGH PERFORMANCE INDUSTRIAL DIESEL ENGINE.

2. ENGINE FILTRATION SYSTEM

- AIR FILTER
- FUEL FILTER
- FULL FLOW LUBO OIL FILTER

ALL FILTERS HAS REPLACEABLE ELEMENTS

3. COOLING SYSTEM

EFFICIENT WATER-COOLED SYSTEM WITH COMPLETE SAFETY GUARDS, DESIGNED TO COOL THE ENGINE AT HIGH AMBIENT TEMPERATURES (CONSULT US FOR DE-RATION FACTORS)

4. EXHAUST SYSTEM

HEAVY DUTY INDUSTRIAL EXHAUST SILENCER

5. CIRCUIT BREAKER TYPE

DELIXI MCCB 3POLE

GENERATING SET MODEL			DPK-DC-220		ALTERNATOR DATA	
OUTPUT RATING	PRIME	STANDBY	MAKE	LEROY SOMER		
50HZ 380-415V, 1500RPM	200KVA	220KVA	MODEL	LSA 46.3 S4		
	160KW	176KW	NO.OF BEARINGS	1		
			INSULATION CLASS	H		
ENGINE TECHNICAL DATA			WIRES			
ENGINE MAKE	CUMMINS		INGRESS PROTECTION	IP23		
ENGINE MODEL	6CTAA8.3-G2		EXCITATION SYSTEM	SHUNT		
GOVERNING TYPE	ELECTRICAL		VOLTAGE	±1%		
NUMBER OF CYLINDERS	6		DIMENSION & WEIGHT			
CYLINDER ARRANGEMENT	IN-LINE		LENGTH mm	3260		
BORE AND STROKE (mm)	114 X 135		WIDTH mm	1100		
DISPLACEMENT	8.3	L	HEIGHT mm	1810		
ASPIRATION	TURBOCHARGED & AIRCOOLED		WEIGHT*kg	2410		
CYCLE	4 STROKE		FUEL TANK CAPACITY	300L		
COMPRESSION RATIO	18.0:1					
COOLING SYSTEM	WATER-COOLING					
FREQUENCY & ENGINE SPEED	50HZ & 1500RPM					
	PRIME	STANDBY	CONTROL PANEL			
			MAKE	DEEP SEA		
GROSS ENGINE POWER kWm	183kWm	203kWm	MODEL	DSE6120		
FUEL CONSUMPTION @ 100% L/hr	45	51				
FUEL CONSUMPTION @ 50% L/hr	23	-	PLEASE REFER TO DSE6120 BROCHURE FOR MORE DETAILS			

PLEASE REFER TO DSE6120 BROCHURE FOR MORE DETAILS

RATINGS DEFINITION

PRIME POWER

THESE RATING ARE APPLICABLE FOR SUPPLYING CONTINUOUS ELECTRICAL POWER (AT VARIABLE LOAD) IN LIEU OF COMMERCIALY PURCHASED POWER. 10% OVERLOAD POWER IS AVAILABLE FOR 1HOUR IN 12HOURS CONTINUOUS OPERATION.

STANDBY POWER

THESE RATING ARE APPLICABLE FOR SUPPLYING CONTINUOUS ELECTRICAL POWER (AT VARIABLE LOAD) IN THE EVENT OF A UTILITY POWER FAILURE. NO OVERLOAD IS PERMITTED.

STANDARD REFERENCE CONDITIONS

OUTPUT RATING ARE PRESENTED AT 27°C AIR INLET TEMPERATURE, BAROMETRIC PRESSURE 100kPa, RELATIVE HUMIDITY 30%. THIS GENERATING SET IS DESIGNED TO OPERATE AT HIGH AMBIENT TEMPERATURE (UP TO 52°C), HUMIDITY (UP TO 90%) AND HIGH ALTITUDES. DE-RATION MAY APPLY, PLEASE CONSULT US FOR SPECIFIC SITE RATINGS.

AVAILABLE OPTIONS & ACCESSORIES

WE OFFER A RANGE OF OPTIONAL FEATURES AND ACCESSORIES TO TAILOR OUR GENERATING SETS TO MEET YOUR POWER NEEDS.

OPTIONS

- A VARIETY OF GENERATING SET CONTROL AND SYNCHRONIZING PANELS
- ADDITIONAL PROTECTION ALARMS AND SHUTDOWNS
- WATER - FUEL SEPERATOR
- WATERJACKET HEATER
- BATTERY CHARGER

ACCESSORIES

- GENUINE SPARE PARTS
- AUXILIARY FUEL TANKS
- MANUAL & AUTOMATIC TRANSFER SWITCHES



شركة الوسام للتجارة ط.م.م.
AL WISAM TRADING CO. L.L.C.

☎ : (+971 6) 539 03 83

✉ : awtc@alwisamllc.com

☎ : (+971 6) 539 03 84

🌐 : www.alwisamllc.com

📍 : 81933, Sharjah - U.A.E.

STANDARD SPECIFICATIONS

6. FUEL SYSTEM

ON GENERATING SETS UP TO 750KVA STANDBY, THE CHASSIS DESIGN IS INCORPORATED WITH INTEGRAL FUEL TANK WITH A CAPACITY OF APPROX 5HOURS TO 8HOURS RUNNING AT FULL LOAD. THE TANK IS SUPPLIED COMPLETE WITH FILL CAP, BREATHER, FUEL FEED AND RETURN LINES TO THE ENGINE AND DRAIN PLUG.

7. ALTERNATOR

7.1 INSULATION SYSTEM

- THE INSULATION SYSTEM IS CLASS H
- ALL WINDINGS ARE IMPREGNATED IN EITHER A TRIPLE DIP THERMOSETTING LIQUID, OIL AND ACID RESISTING POLYESTER VARNISH OR VACUUM PRESSURE IMPREGNATED WITH A SPECIAL POLYESTER RESIN.

- HEAVY COAT OF ANTITRACKING VARNISH ADDITIONAL PROTECTION AGAINST MOISTURE OR CONDENSATION

7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

- THE FULLY SEALED AUTOMATIC VOLTAGE REGULATOR MAINTAINS THE VOLTAGE REGULATION AT $\pm 1\%$.

7.3 MOTOR STARING (OPTIONAL)

- AN OVERLOAD CAPACITY EQUIVALENT TO 300% OF THE FULL LOAD IMPEDANCE AT ZERO POWER FACTOR CAN BE SUSTAINED FOR 10 SECONDS, WHEN AREP (AUXILIARY WINDING) OPTION IS FITTED.

8. MOUNTING ARRANGMENT

8.1 CHASSIS

THE COMPLETE GENERATING SET IS MOUNTED AS A WHOLE ON A HEAVY DUTY FABRICATED STEEL CHASSIS.

8.2 ANTI-VIBRATION MOUNTING DUMPER

DUMPER ARE AFFIXED BETWEEN THE ENGINE & ALTERNATOR FEET AND THE CHASSIS, THUS ENSURING COMPLETE VIBRATION ISOLATION OF ROTATING ASSEMBLY.

8.3 COUPLING

THE ENGINE AND ALTERNATOR ARE DIRECTLY COUPLED BY MEANS OF AN SAE FLANGE. THE ENGINE FLYWHEEL IS FLEXIBLY COUPLED TO THE ALTERNATOR ROTOR.

8.4 SAFETY GUARDS

THE FAN & FAN DRIVE ALONG WITH THE BATTERY CHARGING ALTERNATOR ARE SAFETY GUARD PROTECTED FOR PERSONAL PROTECTION.

9. TESTS

- THE GENERATING SET IS LOAD TEST BEFORE DISPATCH.
- ALL PROTECTIVE DEVICES CONTROL FUNCTIONS AND SITE LOAD CONDITIONS ARE SIMULATED. THE GENERATOR AND IT'S SYSTEMS ARE CHECKED BEFORE DISPATCH.

10. EQUIPMENT FINISHING

ALL MILD STEEL COMPONENTS ARE FULLY DEGREASED AND PAINTED WITH POWDER COATED PAINT TO ENSURE MAXIMUM SCUFF RESISTANCE AND DURABILITY.

11. EQUIPMENT FINISHING

OPERATION & MAINTENANCE MANUAL, CIRCUIT WIRING DIAGRAMS.

12. QUALITY STANDARDS

THE EQUIPMENT MEETS THE FOLLOWING STANDARDS: BS4999, BS5000, BS5514, IEC60034, VDE0530 AND ISO8528

13. WARRANTY

ALL OF THE GENERATING SETS ARE COVERED UNDER A WARRANTY POLICY FOR A PERIOD OF 12MONTHS OR 1 YEAR (WHICHEVER COMES EARLIER) OF THE EQUIPMENT IS IN LINE WITH MANUFACTURERS WARRANTY TERMS AND CONDITIONS.

IN LINE WITH CONTINUOUS PRODUCT DEVELOPMENT, WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.