








BATTIPAV™

DYNAMIC 1200S

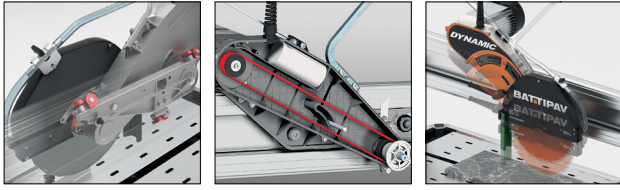

TECHNICAL SPECIFICATIONS		OPTIONAL
Blade (Ø mm)*	300 / 250	 B-Lock for thickness up to 40 mm
Max. straight cutting length (mm)	Blade Ø300 = 1200 Blade Ø250 = 1250	
Max. cutting depth for straight cut (mm)	Blade Ø300 = 110 Blade Ø250 = 80	 Side bench with rollers
Max. size tile for diagonal cutting (mm)	Blade Ø300 = 850 x 850 Blade Ø250 = 880 x 880	
Max. cutting depth with 2 runs (mm)	200	 Extension side bench
Working table dimension (L x W) (mm)	1185 x 625	
Tool hole (Ø mm)	Blade Ø300 = 25.4 Blade Ø250 = 25.4	 Lifting belt
Rotation speed (rpm)	2800	
Motor type	1 phase - 230V ~ 50Hz	 Side tile support
Motor power (HP / kW, A)	1 phase - 3.0 / 2.2, 9.0	
Water recycling pump type	P3	 Long slot for side tile support
Wheels kit	Included	
Cutting progress system	Included	
Laser instrument	Included	

*Diamond blade not included.

The Dynamic Bridge Saw is a powerful, precision cutting machine for construction and masonry. Its antiskid POLY V belt ensures smooth operation in tough conditions. Built for durability and accuracy, it easily cuts bricks, stone, concrete, granite, marble, and gres. It offers manual forward cutting and motorized plunge cutting, and supports Ø250 mm and Ø300 mm diamond blades for clean, professional results.

Distributor:



شركة الوسام للتجارة ك.م.م.
AL WISAM TRADING CO. L.L.C.

☎ : (+971 6) 539 03 83

✉ : awtc@alwisamllc.com

☎ : (+971 6) 539 03 84

🌐 : www.alwisamllc.com

📍 : 81933, Sharjah - U.A.E.